
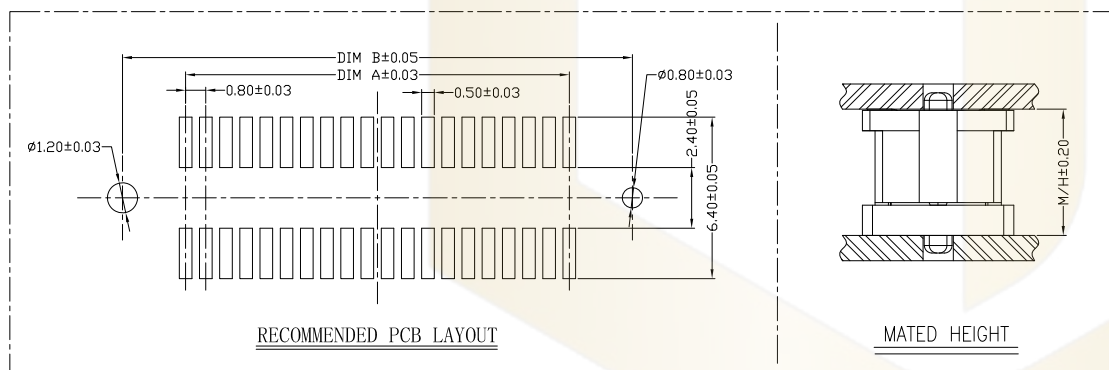

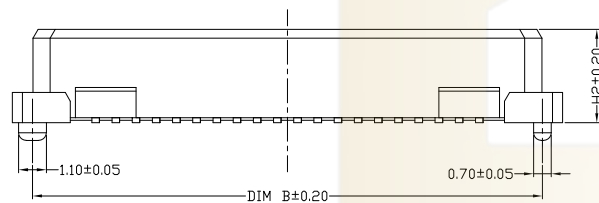


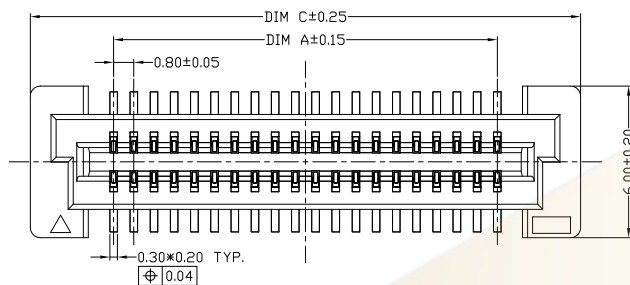

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 100V/0.8A AC;
- 2.WITHSTANDING VOLTAGE: 500V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 1000M Ω MIN;
- 4.CONTACT RESISTANCE: 50m Ω MAX;
- 5.OPERATING TEMPERATURE RANGE: -40° C TO 125° C.

MATERIAL:

- 1.INSULATOR: LCP,NATURAL UL94V-0;
- 2.TERMINAL: COPPER ALLOY;

PLATING:

- 1.TERMINAL: GOLD PLATING,
NICKEL 40u" MIN. OVER ALL;

FEMALE H2	MATED HEIGHT			
	MALE H1			
4.7	5.7	6.7	7.7	
3.7	5.0	6.0	7.0	8.0
7.7	9.0	10.0	11.0	12.0
11.7	13.0	14.0	15.0	16.0
15.7	17.0	18.0	19.0	20.0

NO.of contacts	Dimensions		
	A	B	C
20	7.20	12.20	13.80
30	11.20	16.20	17.80
40	15.20	20.20	21.80
50	19.20	24.20	25.80
60	23.20	28.20	29.80
80	31.20	36.20	37.80
100	39.20	44.20	45.80
120	47.20	52.20	53.80
140	55.20	60.20	61.80

Ordering Information

HC-PBB 08 - * - N - * - H* - ** - R - P -07

PITCH
05=0.5mm
08=0.8mm

1= 单槽
2= 双槽

No. of
Pins (Pin 1 to 8)
20P~160P
20=20Pin
30=30Pin
.....

Nature
M=Male
F=Female

Plastic
Height(H)
H3.7 = 3.7mm
H7.7 = 7.7mm
H11.7=11.7mm
H15.7=15.7mm

Contact
G1:1u" Gold

Plating
+COP

R=Reel
(18mm x 2)

Post
(1.1mm)

			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO., LTD			
			DIM TOL	审 核 CHECK				
			X. X ±0.30	批 准 APPROVAL	产品名称 TITLE	BTB 0.8 单槽 母座 立贴 带柱 编带+盖	版 本 REV.	A
1	初版发行		X. XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-PBB08-1-N-F-HX-XX-R-P-07	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	X. XXX ±0.10	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1
			Angle ±3.0°					